


Ref.2030F WEBBING LANYARD

GENERAL

Affordable 27 mm polyester tubular webbing lanyards with open loop attachment points on both ends.
 No shock absorber.
 Certified for positioning use or as anchors only.
 Strength 22 kN.


- 2030050F SINGLE 50 cm
- 2030100F SINGLE 100 cm
- 2030150F SINGLE 150 cm
- 2030200F SINGLE 200 cm

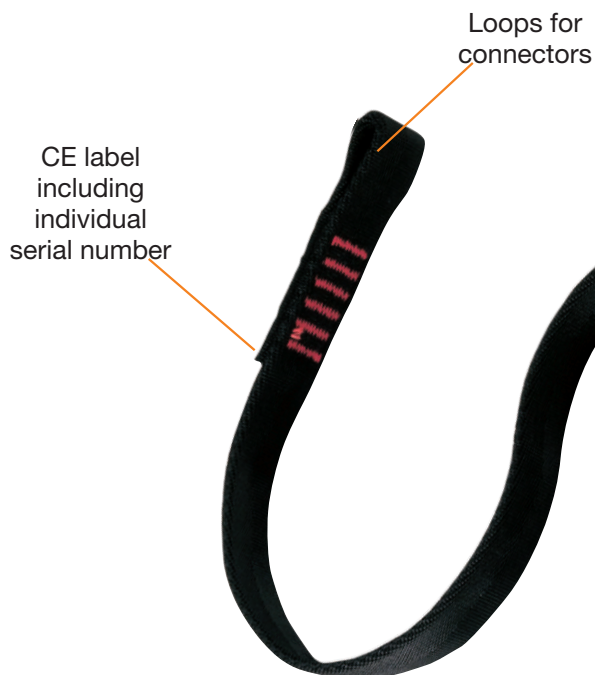

High strength polyamid stitchings.
 Breaking load >22 kN



Polyester tubular webbing
 27 mm wide

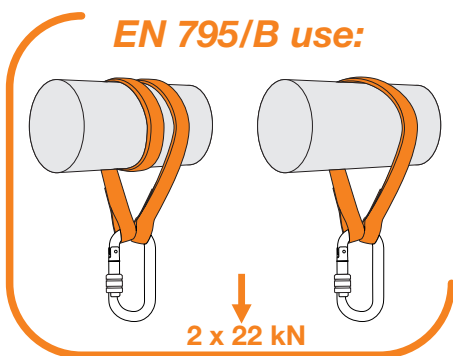

Ref.	Product name Nombre del producto	Weight Peso		CE	
		g	oz	EN 354	EN 795/B
2030050F	WEBBING LANYARD SINGLE 50 cm	55	1.9	•	•
2030100F	WEBBING LANYARD SINGLE 100 cm	90	3.2	•	•
2030150F	WEBBING LANYARD SINGLE 150 cm	120	4.2	•	•
2030200F	WEBBING LANYARD SINGLE 200 cm	155	5.5	•	•