

204101 DOUBLEX

Positioning lanyard in 16 mm polyamide webbing, two sections of differing length.
Connection of the two sections by an aluminium alloy ring for maximum strength (22 kN) in all directions.

CE EN 354

ROPE ACCESS

TEAM RESCUE



Fig.1 - Positioning double lanyard.
Fig.2 - Use with an absorber EN 355.
Fig.3 - Used as single lanyard.

Version with connectors included available (ref.204102).

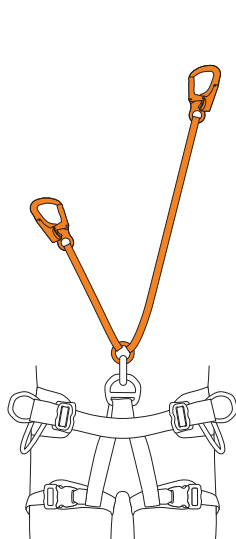
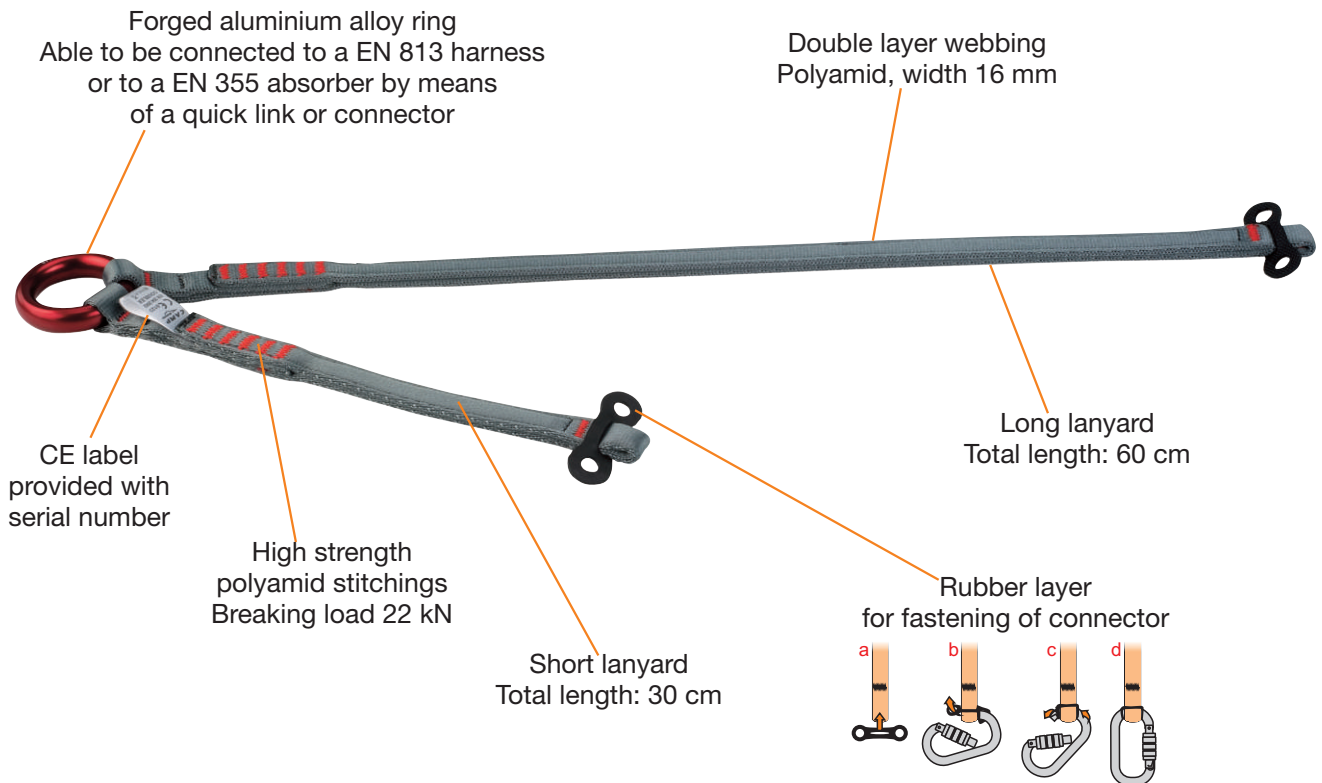


FIG.1

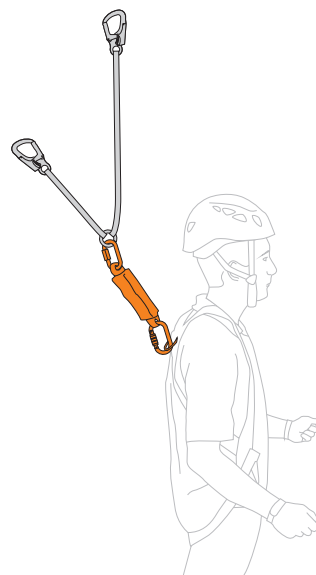


FIG.2

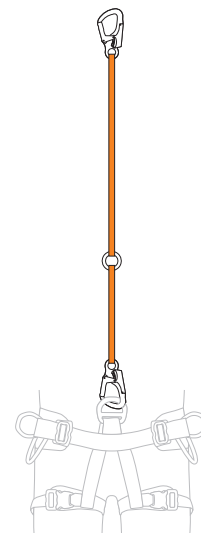


FIG.3