

7030201 SHOCK ABSORBER REWIND LANYARDS

TECHNICAL SHEET

Double fall-arrest lanyard made of tubular webbing with elastic sewn in to automatically contract the lanyard and keep it out of the way when not weighted.

Equipped with standard shock absorber (ref.2029).
Extended length 175 cm.

CE EN 355

CONSTRUCTION


PYLONS/INDUSTRY

ROPE ACCESS



Shock Absorber
Ref.2029
Maximum extension:
Fall factor 1 = 90cm
Fall factor 2 = 160cm
Maximum peak force:
<6kN (3.5-4.5kN approx.)

Polamide tubular webbing
Width 32mm
Elastic tape inside

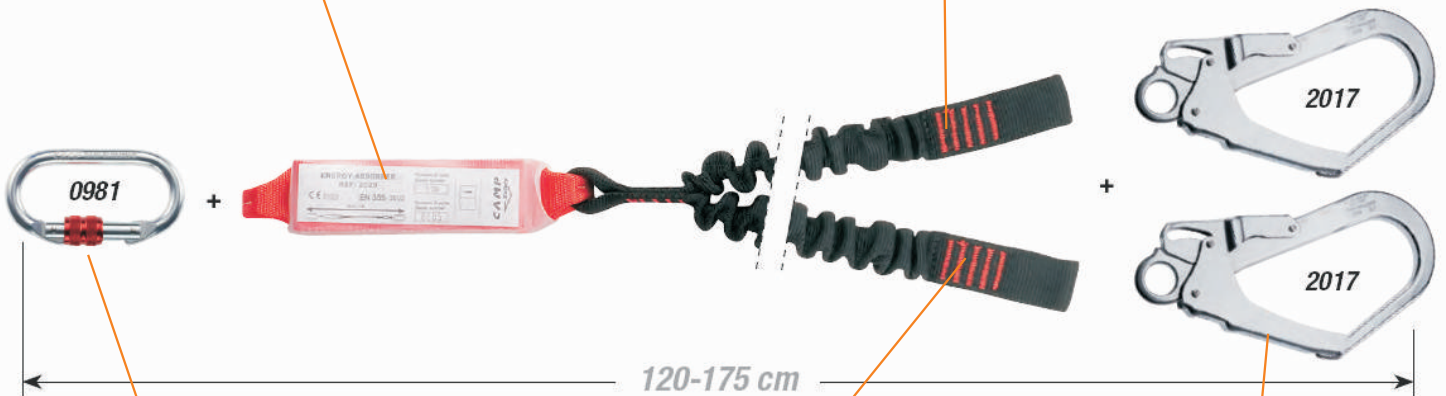

Oval screw connector Ref.981
Zinc plated carbon steel
Breaking load 25kN
Opening 16mm

High strength polyamid stitching
Breaking load 22kN

Safety hook Ref.2017
Zinc plated carbon steel
Breaking load 25kN
Opening 53mm